



Venting Valves 1/4"

Automatic Ozone Off-Gas Venting Valves

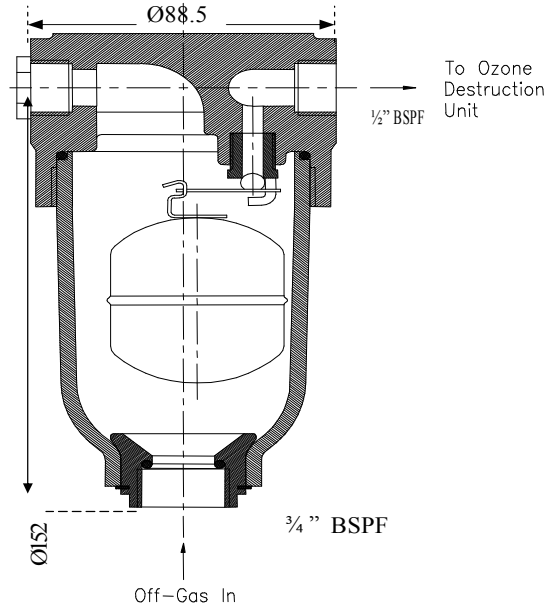


PART NO: OB-1-000001
 MAX. VENT RATE : 20m³/h
 MAX. TEMP : 30°C

MAX. DIFFERENTIAL PRESSURE : 170 kPa
 MAX. STATIC PRESSURE : 1000kPa

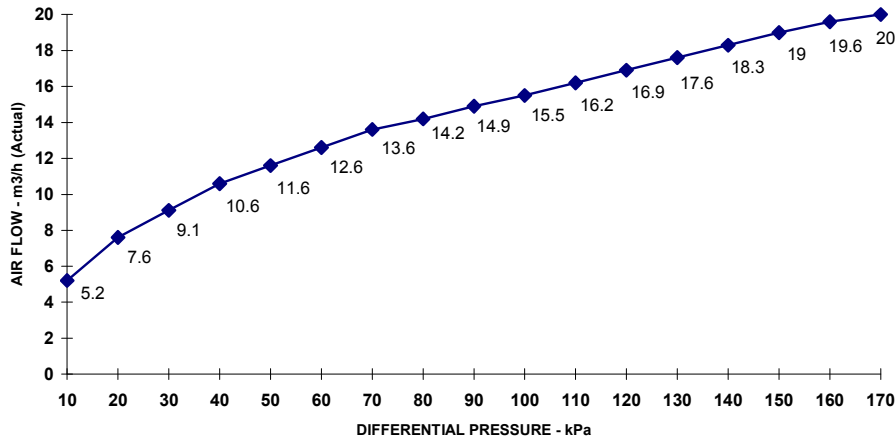


Suggested Installation Methods

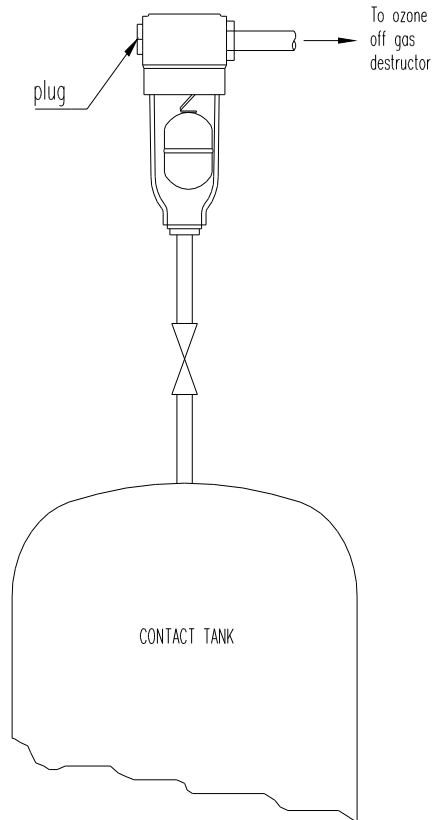

Installation Method 1.

For simple off gas venting.
Note: The full venting capacity of the valve will not be achieved with this installation method. Derate the valve venting rate by 50%.

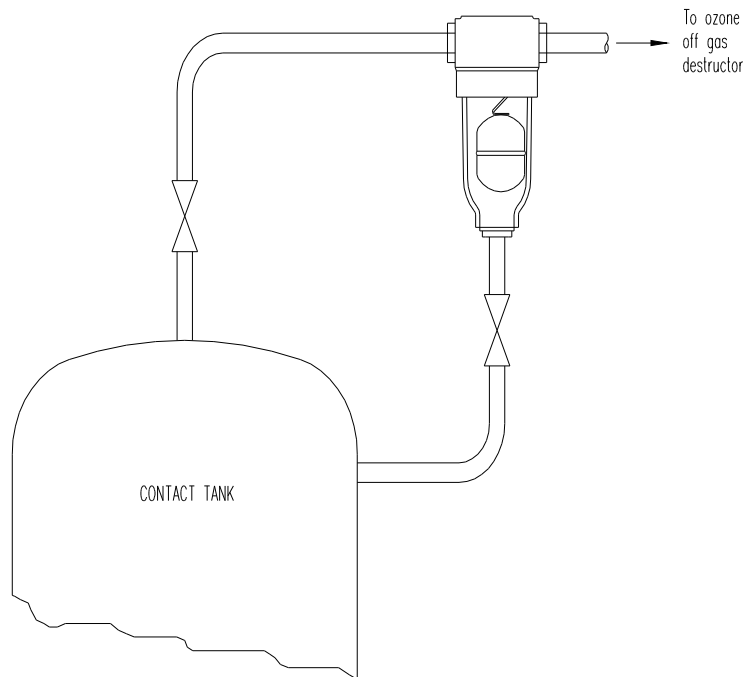

Installation Method 2.

For continuous venting with equalisation line.
To be used where large amounts of off gas must be vented.



WATERTEC
Engineering Pty Ltd

Australia

Watertec Engineering Pty. Ltd
P.O. Box 628
Waterford,
Brisbane, QLD,
Australia, 4133.
Tel: +61-(0)7-3287-1288
Fax: +61-(0)7-3287-2800
Web: www.watertecengineering.com
Email: sales@watertecengineering.com

Malaysia

Waterotec (M) Sdn Bhd
Lot 5, Jalan Perusahaan 3/3,
Batu 20, 48000 Rawang,
Selangor Darul Ehsan
West Malaysia
Tel: + 603 6092 9029
Fax: + 603 6092 9025
Web: www.watertecengineering.com
Email: sales@waterotec.com